

GeoRes System HC-W


GeoRes System HC-W	High Capacity Well Bore Data Acquisition, and RAID System
Station Capacity	Scalable: User Specified number of DS-250 or DW-150 modules
Remote Well Capability	6 fiber optic telemetry inputs
Chassis Expansion	Scalable: Up to 8 chassis
Borehole Power Control	Lockout Tagout capability is provided
Record Length	64 seconds with no intra-time
Overlapping records	System can time stamp and store overlapping timing
Data Format on Disc	SEGD Rev2, SEG Y Rev1
Data Storage System	Internal 2 terabyte RAID or External Raid if required.
Recording Modes	Time Break Trigger, Continuous Acquisition Overlapping Shooting (System overlapping: time stamp on header)
Remote Control	Can be operated remotely via secure network
GPS Synchronization	Better than 1 part in 10 million
Flexible Architecture	GeoRes HC system architecture is designed to be flexible for easy software upgrades. Works with HC-A system for additional simultaneous analog recording.
Operating Temperature	0 to +50 °C
Storage Temperature Range:	-20 to 70 °C
Auxiliary Module	Twelve 24-Bit Analog inputs for source reference
Analog Channels	Twenty Four 24-Bit Analog inputs for surface Geophones
Power Supply	120-240 VAC
Central UPS	To provide power in case of power interruption

All specifications subject to change without notice

GeoRes System Tests

The seismic channel performance and sensor tests can be performed by the GeoRes System. The user can choose a partial or complete set of tests that can be run in sequence. The user can also choose to display all of the results or only the failures. In the tests described below, the system software automatically controls the Channel Input Switch Positions and Test Oscillator Settings during the tests. All tests can be run at all sample intervals and preamp gains of the GeoRes Seis Channels.

- Harmonic Distortion
- Equivalent Input Noise
- Common Mode Rejection
- Instantaneous System Dynamic Range
- Geophone Impedance and THD
- Impulse Response
- Gain Accuracy
- Crossfeed (multi-channel)

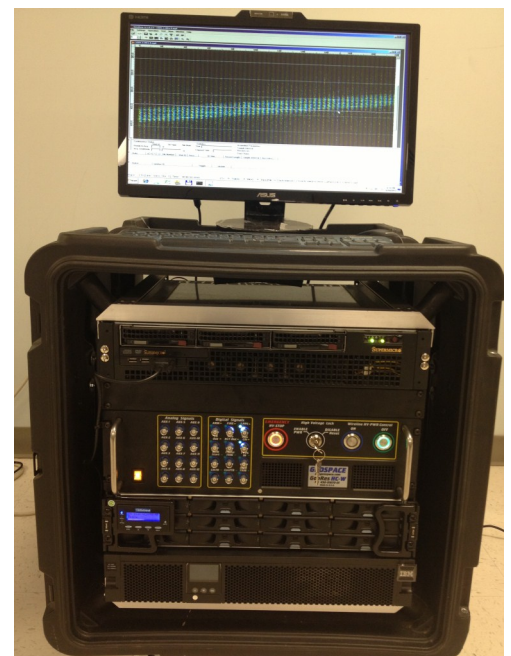

GeoRes System HC-W

Features and Specifications

- Built-in GPS
- Built-in full resolution test signal generator
- Scalability up to 8 chassis
- Continuous recording mode
- Compatible with vibratory, explosive and impulsive energy sources
- 12 analog inputs for source signal recording
- 24 analog inputs for standard analog sensor seismic recording
- 6 fiber optic telemetry inputs for remote well operation
- 24-bit delta-sigma ADC
- 1 Hz to 1600 Hz freq. response
- <1 μ sec. of UTC (GPS clock)
- Operating Temperature: 0° C to +50° C
- Selectable Gains:
 - X1, X2, X4, X8, X16, X32, X64
 - 0, 6, 12, 18, 24, 30, 36 dB
- Sample Intervals:
 - .25, .5, 1, 2, 4 milliseconds

Max input signal: 1.80 Vrms @ 0 Gain
Total Dynamic Range: 140 dB
System Dynamic Range @ 0dB Gain: 126 dB @ 4 msec SI 124 dB @ 2 msec SI 120 dB @ 1 msec SI 117 dB @ .5 msec SI 106 dB @ .25 msec SI
Equivalent Input Noise @ 2 msec SI: 1.13 μ V @ Gain 0 dB .58 μ V @ Gain 6 dB .33 μ V @ Gain 12 dB .22 μ V @ Gain 18 dB .19 μ V @ Gain 24 dB .18 μ V @ Gain 30 dB .17 μ V @ Gain 36 dB
Input Impedance: 20 kohms/0.06 μ f Difference Mode 5 kohms Common Mode

System Dynamic Range @ 2 msec SI 124 dB @ Gain 0 dB 123 dB @ Gain 6 dB 122 dB @ Gain 12 dB 120 dB @ Gain 18 dB 115 dB @ Gain 24 dB 110 dB @ Gain 30 dB 105 dB @ Gain 36 dB
Total Harmonic Distortion: 0.001%
Common Mode Rejection: 80db
Gain Accuracy: 1%
Anti-Alias Filter: Rejection @ Nyquist: 130 dB Frequency @ -3 dB: 0.83 Nyquist Linear or Minimum Phase
GPS Time Standard: <1 ppm
Mounts in a standard 19" rack.

All specifications subject to change without notice



7007 Pinemont Drive • Houston, Texas 77040 USA

www.geospace.com

Tel: 713.986.4444 • Fax: 713.986.4445



Regional
Offices
Geospace Technologies, Canada
2735 - 37th Avenue N.E.
Calgary, Alberta, Canada T1Y 5R8
403.250-9600

Geospace Technologies, Eurasia
Kirovogradskaya, 36
Ufa, Baskortostan, Russia 450001
011 (7) 3472 25 39 73

Geospace Technologies, China
Room 700, 7th Floor, Lido Office Tower, Lido Place
Jichang Road, Jiang Tai Road, Beijing, 100004, P.R.China
011 (86) 10 6437 8788

Geospace Engineering Resources International (GERI), UK
F3 Bramingham Business Park, Enterprise Way, Luton
Bedfordshire LU3 4BU, England
011 44 (0) 7775 688 467