


## OCEAN BOTTOM RECORDER

3,450 METERS MAX OPERATING DEPTH

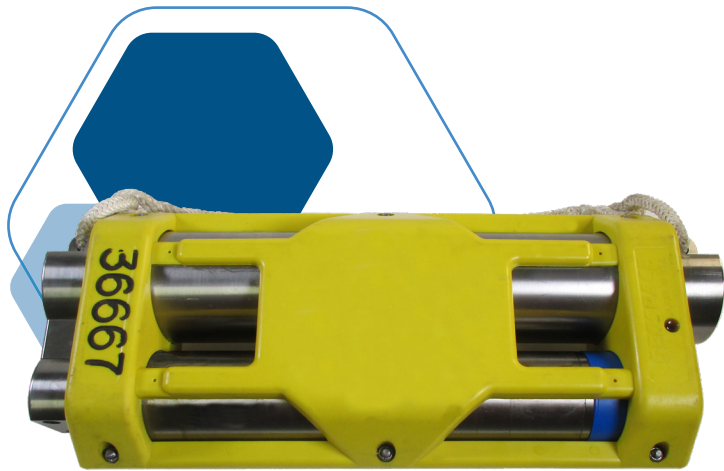

### PRODUCT DESCRIPTION

The OBX2-125 is designed for extended-duration seabed ocean bottom seismic data acquisition. Nodes can be deployed in depths down to 3,450 meters with continuous recording for up to 125 days.

### FEATURE HIGHLIGHTS

- Continuous cable-free 4C autonomous recording
- Battery module: 125 days operation
- Built-in full resolution test generator
- Solid-state flash memory: 32 GB per channel
- CSAC clock
- Internal Heading Sensor
- 3 Component Magnetic Sensor
- $\pm 5^\circ$  Accuracy
- Measurements written to header every 2,000 samples





# GS-ONE OMNI

## Geophone



### PHYSICAL SPECIFICATIONS

Moving Mass	13.2 g	0.466 oz
Maximum coil excursion p-p	4.06 mm	0.16 in.
Minimum coil excursion p-p	1.02 mm	0.04 in.
Diameter	30.5 mm	1.2 in.
Height	40.7 mm	1.6 in.
Weight	130 g	4.60 oz
Operating and Storage Temperature Range	-40°C to +100°C	-40°F to +212°F

### ELECTRICAL SPECIFICATIONS

All parameters are specified with 7.5 k $\Omega$  load at 25°C in all tilt positions unless otherwise stated.

Frequency	15 Hz
Spurious Frequency	>160 Hz
Distortion at Horizontal	0.05% Typical
Coil Resistance	1450 $\Omega$
Open-Circuit Sensitivity	69.2 V/m/s (1.75 V/i/s)
Sensitivity at 70% Damping	69.2 V/m/s (1.75 V/i/s)
Open-Circuit Damping	70%
Distortion at all tilt angles	<0.2% measured at 15 Hz with 0.2 in/s p-p

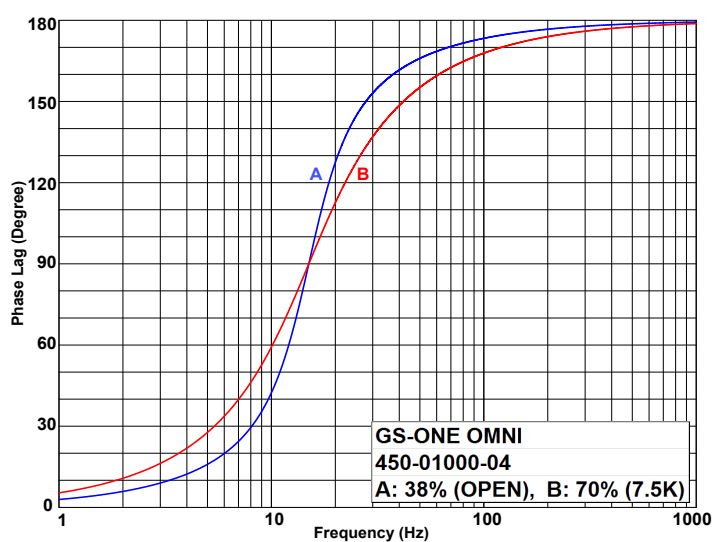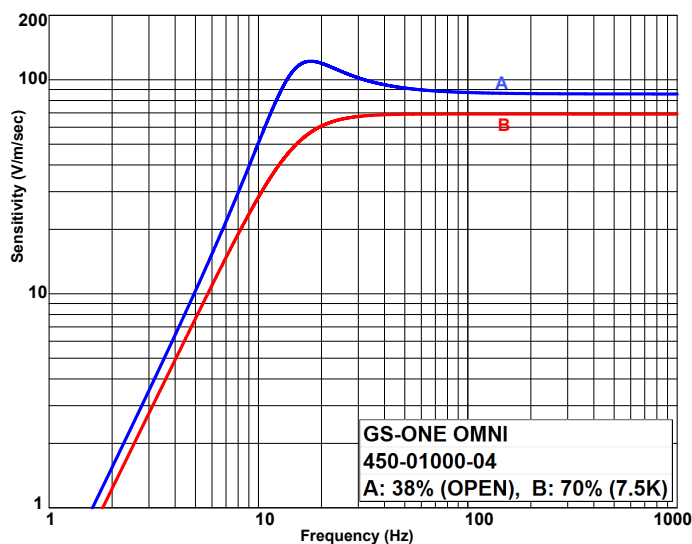

# DEEPENDER™ 5000-X

## Hydrophone

### PHYSICAL SPECIFICATIONS



Maximum Operating Pressure	34.5 MPa (5,000 psi)
Maximum Working Depth	3450 m (11,319 ft.)
Operating Temperature Range <sup>1</sup>	-10 to +75°C (+14 to 167°F)
Outside Diameter	50.8 mm (2.0 in.)
Length	38.1 mm (1.5 in.)

### ELECTRICAL SPECIFICATIONS

Nominal Capacitance (at 25°C 1atm)	20.0 nanofarads
Voltage Sensitivity <sup>2</sup>	4.0 $\mu\text{V}/\mu\text{Bar}$
Sensitivity (dBv ref 1 $\mu\text{Pa}$ @ 25°C)	-181.9 dB re 1nC/ $\mu\text{Pa}$ +/- 1.5dB
Frequency Response (into 2 M $\Omega$ load)	3 –15,000 Hz

1. Safe to be used slightly below 0°C as long as water is not frozen. Do not let hydrophone be frozen in ice, as this will cause irreversible damage to the crystals.

2. Voltage Sensitivity is specified when connected to OBX.

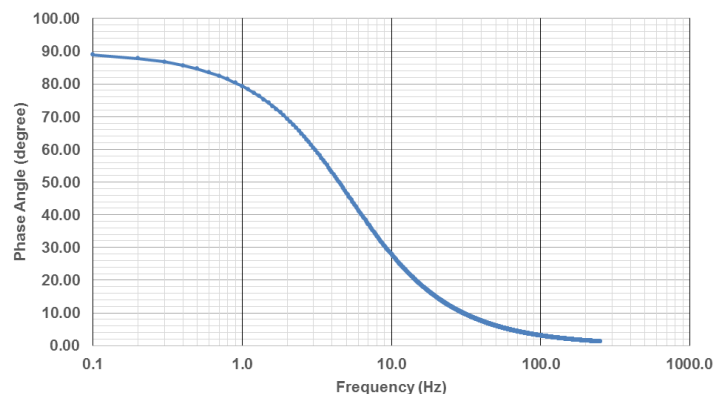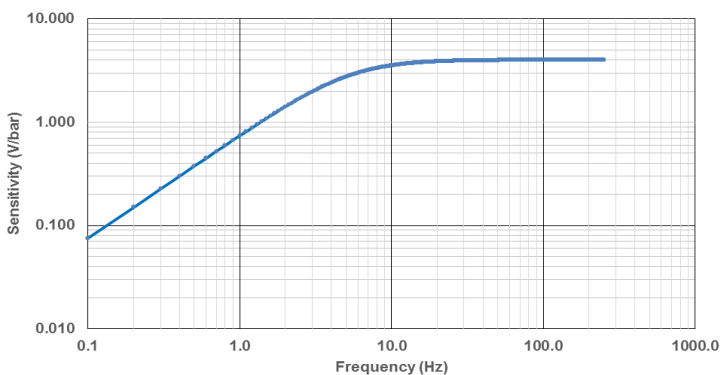

# OBX2-125

## OCEAN BOTTOM RECORDER



### MECHANICAL SPECIFICATIONS (HOUSING)

	METRIC	US
Length	475 mm	18.7 in.
Width	208 mm	8.2 in.
Height	106 mm	4.25 in.
Weight in Air	15 kg	33 lbs.
Weight in Seawater	8 kg	17.65 lbs.
Maximum Operating Pressure	34.5 MPa/345 Bar	5,000 psi
Maximum Operating Depth	3,450 M	11,316 ft.
Operating Temperature Range	-5°C to +60°C	+23°F to +140°F
Storage Temperature Range	-10°C to +60°C	+14°F to +140°F

### ELECTRICAL SPECIFICATIONS

Digitized 4C Recording Station:	4 Channel, 24 Bit A/D Digitizer 3C Orthogonal oriented GS-One OMNI 15 Hz Geophones 1 DEEPENDER Hydrophone			
Digitization	24-bit Delta-Sigma			
Sample Interval	0.25, 0.5, 1, 2, 4 ms			
Pre-amplifier Gains	0, 6, 12, 18, 24, 30, 36 dB			
Maximum Input Signal	1.8Vrms			
Equivalent Input noise (@2ms sample interval)	0.17 $\mu$ Vrms			
Gain Accuracy	Better than 1%			
Anti-alias Filter	83% Nyquist			
Instantaneous Dynamic Range	124dB @ 2 ms sample interval			
THD	<0.2%			
Distance Between Digitizer & Farthest Sensor	<18 cm			
Distance Between All Sensors	<13 cm			
Flash Memory	32 GB per channel			
Frequency Response	1 Hz – 1650 Hz @ ¼ ms sample interval			
Battery Module	125 days operation			

### CLOCK SPECIFICATIONS

Days	30	60	90	100
Max Uncorrected Drift	2ms	8ms	17ms	21ms
Corrected Drift	<.25ms	<.5ms	1ms	1ms

SOLUTIONS FOR A SMARTER FUTURE

Specifications subject to change at sole discretion of Geospace Technologies.