




GS-20 DX Geophone

INDUSTRY STANDARD GEOPHONE

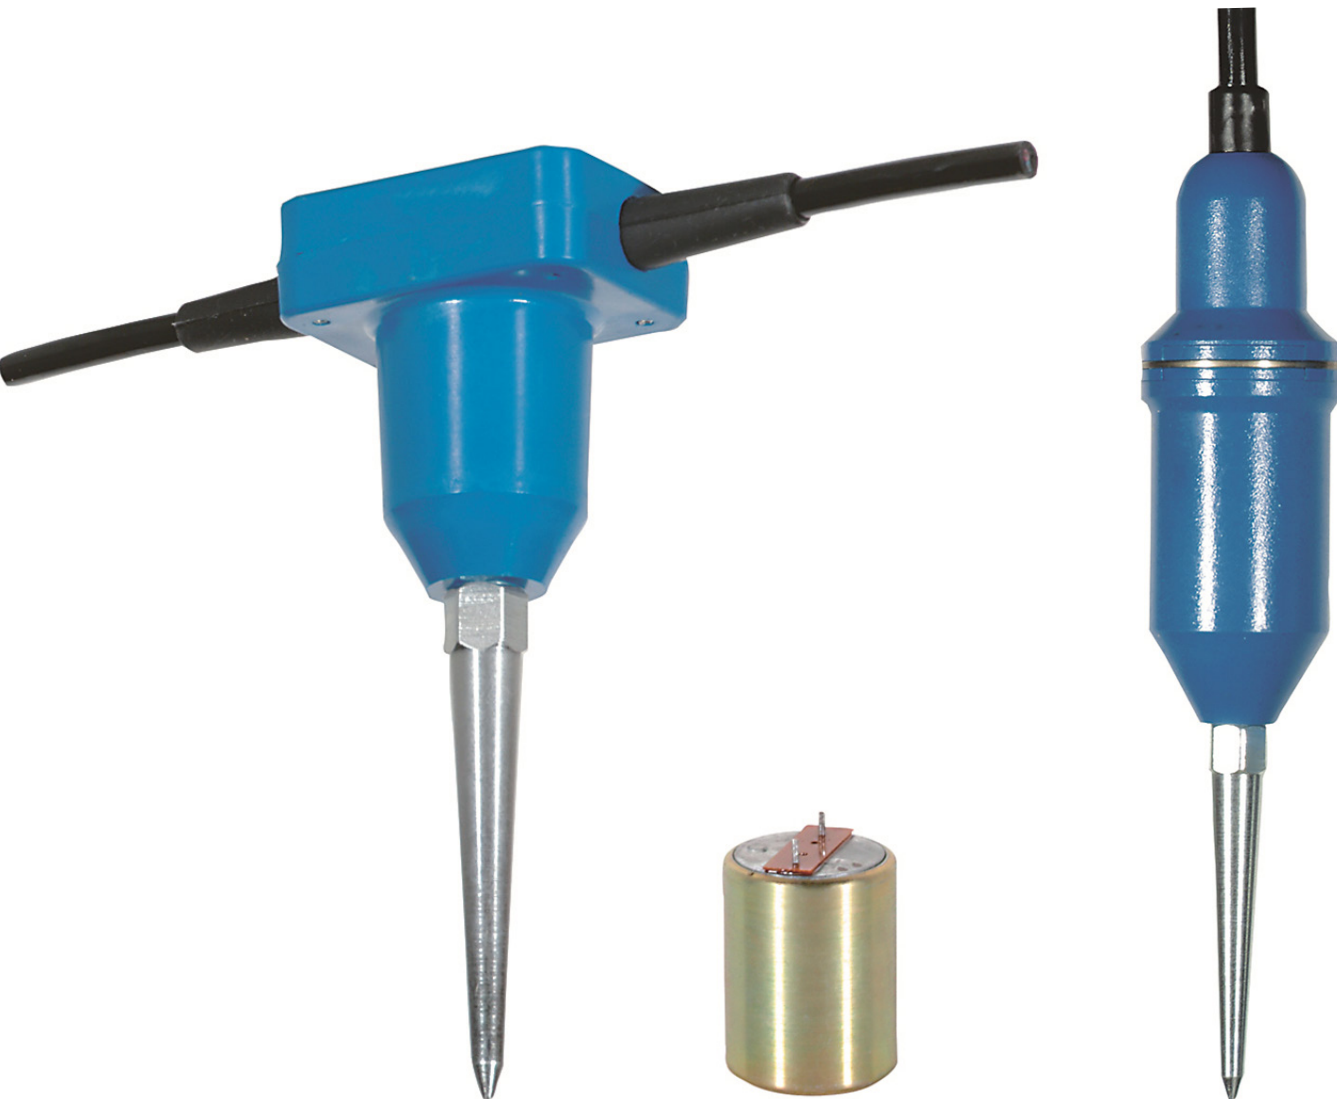

PHYSICAL SPECIFICATIONS	
Orientation	Vertical and Horizontal available
Moving Mass	11.0 g (0.388 oz)
Maximum Coil Excursion p-p	1.5 mm (0.06 in.)
Diameter	2.54 cm (1.0 in)
Height (less terminals)	3.3 cm (1.3 in)
Weight	87.3 g (3.08 oz)
Operating & Storage Temperature Range	-45° to +100°C (-49 to +212°F)
ELECTRICAL SPECIFICATIONS @25°C	
Frequency	10 Hz *
Spurious Frequency	>250 Hz
Distortion at Vertical	<0.20%
Coil Resistance	395 Ω *
Open-Circuit Sensitivity	27.6 V/m/s (0.700 V/in/s)
Sensitivity at 70% Damping	19.8 V/m/s (0.502 V/in/s)
Open Circuit Damping	30%
Tilt Angle when coil hits end stop	Vertical geophone = 37° Horizontal geophone ±10°

* Other frequencies and resistances available.

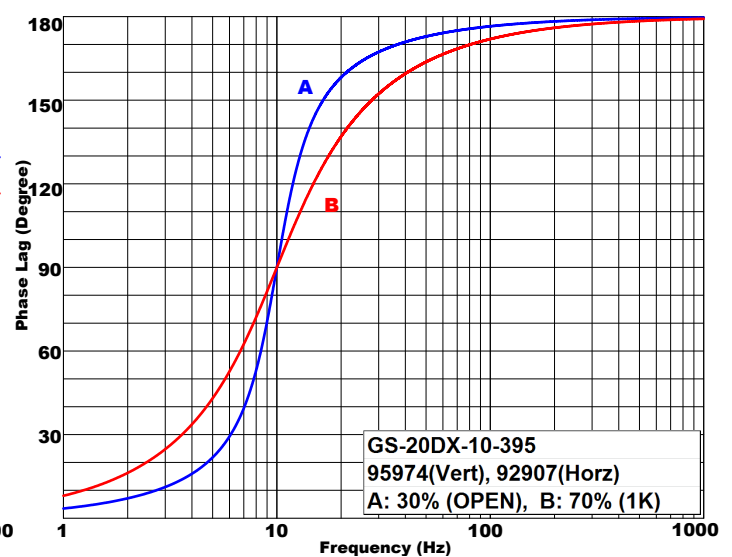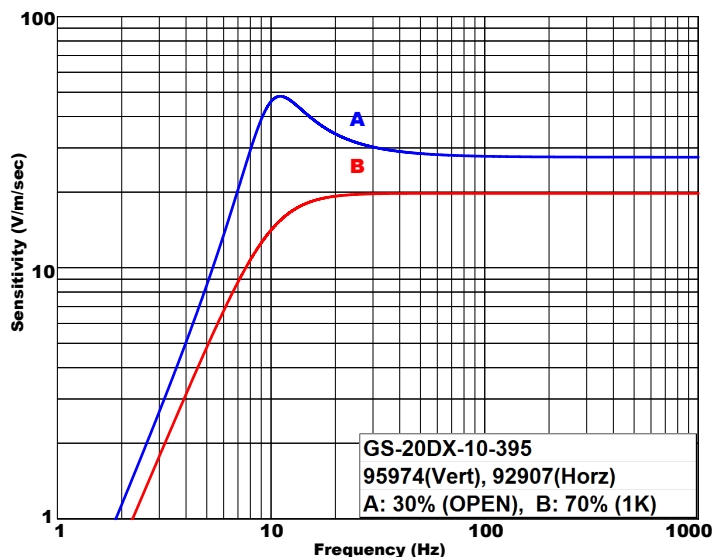

7007 Pinemont Drive • Houston, Texas 77040 USA
www.geospace.com • T: 713-986-4444 • F: 713-986-4445