

# GSX-C

## Land Based Recorder

### With Cellular Network Access



### Cable-free, Radio-free, Autonomous Data Recorder

- Scalability greater than 50,000 channels
- Delivers high-resolution with a 24-bit delta-sigma ADC
- Built-in GPS receiver and disciplined clock
- Accepts standard analog sensor inputs
- Has a built-in full-resolution test generator
- Available as 1 or 3 channel versions (GSX-C, GSX3-C)
- Has an LED Status/Deployment state indicator
- Real-time status update to the Cloud
- Seismic data retrieval on demand via 4G network

## Cable-free, Radio-free Autonomous Data Recording

The GSX-C is designed for cable-free/radio-free seismic data recording. The self-contained unit includes 1 or 3 channels of 24-bit digitization, an integrated high sensitivity GPS receiver, built-in test signal generator, up to 32 GB per channel of non-volatile solid-state data storage, and a high-speed data port. The unit is housed in a sealed case, with an input connector and an extended life battery/data port connector.



### Cellular Network Access

4G cellular network access is available in US and European models. Statuses can be uploaded at user-selectable intervals. Seismic data can be uploaded to the cloud on demand.

### GSX System Tests

The seismic channel performance and sensor tests can be performed by the GSX-C System. The user can choose a partial or complete set of tests that can be run in sequence. The user can also choose to display all of the results or only the failures. In the tests described below, the system software automatically controls the Channel Input Switch Positions and Test Oscillator Settings during the tests. All tests can be run at all sample intervals and preamp gains of the GSX-C.

- ▲ Harmonic Distortion
- ▲ Impulse Response
- ▲ Equivalent Input Noise
- ▲ Instantaneous System Dynamic Range
- ▲ Gain Accuracy
- ▲ Common Mode Rejection
- ▲ Geophone Impedance and THD
- ▲ Crossfeed (multi-channel)

# Land Based Recorder

## FEATURES AND SPECIFICATIONS

- 24-bit digital recorder
- Built-in GPS and disciplined clock
- Built-in full resolution test signal generator
- Solid-state flash memory
- Scalability greater than 50,000 channels
- Greater than 30 days of continuous recording
- Compatible with vibratory, explosive, and impulsive energy sources
- LED Status/Deployment State Indicator
- Accepts standard analog sensor input
- Available as 1 or 3 channel versions
- 24-bit delta-sigma ADC
- 1 Hz to 1600 Hz freq. response
- <20  $\mu$ sec of UTC (GPS clock)
- Up to 32 GBytes per channel flash memory storage
- External extended life battery
- Operating Temperature:  $-40^{\circ}$  C to  $+85^{\circ}$  C
- Humidity: 0 to 100%
- Selectable Gains:
  - X1, X2, X4, X8, X16, X32, X64
  - 0, 6, 12, 18, 24, 30, 36 dB
- Sample Intervals:
  - .25, .5, 1, 2, 4 milliseconds


<b>Max Input Signal:</b>	1.80 Vrms @ 0 Gain
<b>Total Dynamic Range:</b>	140 dB
<b>System Dynamic Range @ 0dB Gain:</b>	
	126 dB @ 4 msec SI
	124 dB @ 2 msec SI
	120 dB @ 1 msec SI
	117 dB @ .5 msec SI
	106 dB @ .25 msec SI
<b>Equivalent Input Noise @ 2 msec SI:</b>	
	1.13 $\mu$ V @ Gain 0 dB
	0.58 $\mu$ V @ Gain 6 dB
	0.33 $\mu$ V @ Gain 12 dB
	0.22 $\mu$ V @ Gain 18 dB
	0.19 $\mu$ V @ Gain 24 dB
	0.18 $\mu$ V @ Gain 30 dB
	0.17 $\mu$ V @ Gain 36 dB
<b>Input Impedance:</b>	
	20 k $\Omega$ /0.06 $\mu$ f Difference Mode
	205 k $\Omega$ Common Mode

<b>System Dynamic Range @ 2 msec SI:</b>	
	124 dB @ Gain 0 dB
	123 dB @ Gain 6 dB
	122 dB @ Gain 12 dB
	120 dB @ Gain 18 dB
	115 dB @ Gain 24 dB
	110 dB @ Gain 30 dB
	105 dB @ Gain 36 dB
<b>Total Harmonic Distortion:</b>	0.0005%
<b>Common Mode Rejection:</b>	0.001%
<b>Gain Accuracy:</b>	1%
<b>Anti-Alias Filter:</b>	
	Rejection @ Nyquist: 130 dB
	Frequency @ $-3$ dB: 0.83 Nyquist
	Linear or Minimum Phase
<b>GPS Time Standard:</b>	<1 ppm
<b>Weight:</b>	2 lbs.
<b>Max Dimensions:</b>	3.5"W x 3.0"H x 6.67"L

# GSX-C

Land Based Recorder

## Big Advances in Small Packages

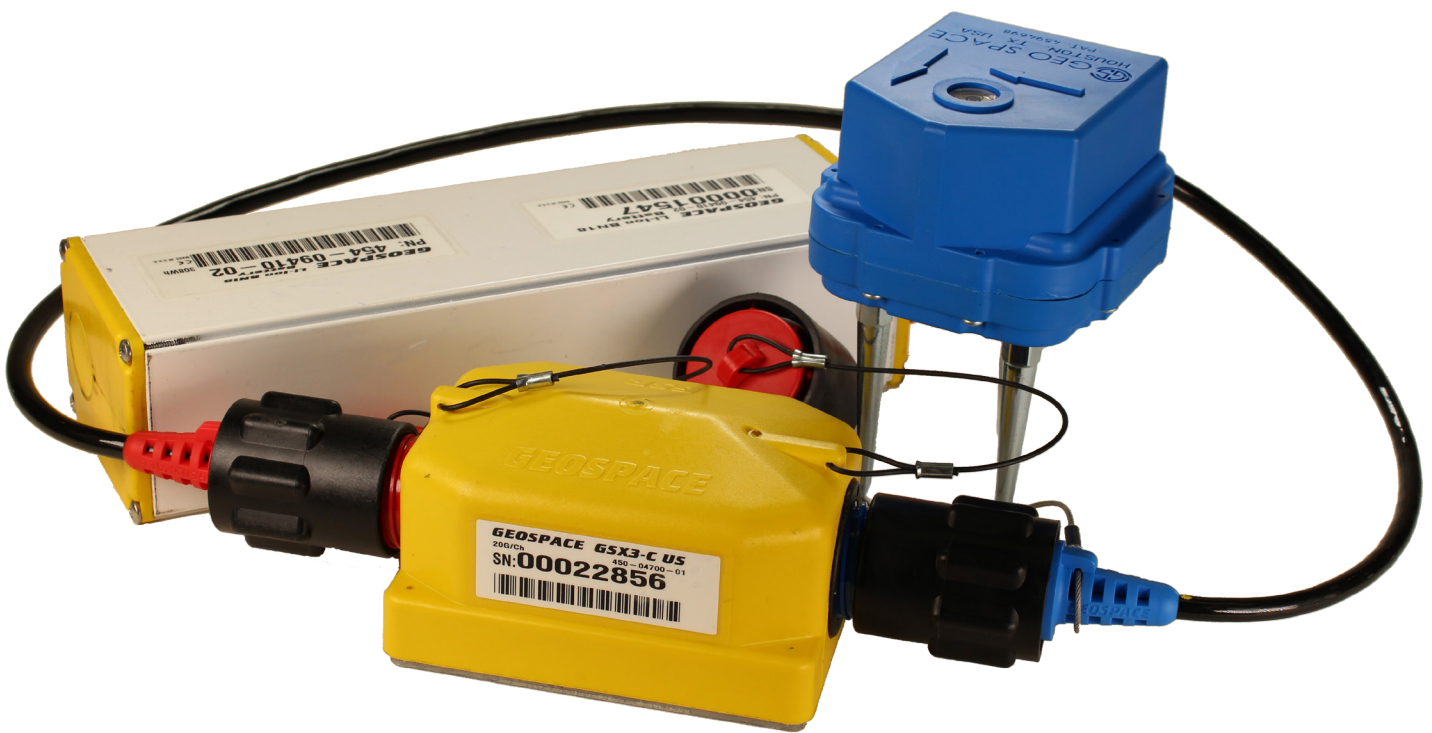

*GSX3-C with a BN18 battery and a GS-ONE LF three component geophone in a Land Case*



7007 Pinemont Drive • Houston, Texas 77040 USA

[www.geospace.com](http://www.geospace.com)

Tel: 713-986-4444 • Fax: 713-986-4445

Geospace Technologies, Canada  
2735 - 37th Avenue N.E.  
Calgary, Alberta,  
T1Y 5R8 Canada  
403 250-9600

Geospace Technologies, China  
Room 700, 7th Floor  
Lido Office Tower, Lido Place  
Jichang Road, Jiang Tai Road  
Beijing, 100004, P.R.China  
011 (86) 10 6437 8768

Geospace Technologies  
Sucursal Sudamericana  
Carrera 127-22 G 28 Int. 30  
Agrupación Industrial La Esperanza  
Bogotá, Colombia  
011-57-1-742-7414

Geospace Technologies, Eurasia  
Kirovogradskaya, 36  
Ufa, Baskortostan  
Russia 450001  
011 (7) 3472 25 39 73



Geospace UK  
F3 Bramingham Business Park,  
Enterprise Way, Luton  
Bedfordshire LU3 4BU, England  
011 44 (0) 7775 688 467