

OBX Ocean Bottom Recorder

OBX-750E



- **Continuous cable-free 4C autonomous recording**
- **Maximum operating depth: 750 meters**
- **Battery module: 60 days**
- **Built-in full resolution test generator**
- **Solid-state flash memory: 8 GB per channel**
- **OVCXO clock**



PHYSICAL SPECIFICATIONS

Moving Mass	13.2 g	0.466 oz
Maximum coil excursion p-p	4.06 mm	0.16 in.
Minimum coil excursion p-p	1.02 mm	0.04 in.
Diameter	30.5 mm	1.2 in.
Height	40.7 mm	1.6 in.
Weight	130 g	4.60 oz
Operating and Storage Temperature Range	-40°C to +100°C	-40°F to +212°F

ELECTRICAL SPECIFICATIONS

All parameters are specified with 7.5 kΩ load at 25°C in all tilt positions unless otherwise stated.



Frequency	15 Hz
Spurious Frequency	>160 Hz
Distortion at Horizontal	0.05% Typical
Resistance with 7.5 kΩ load	1450 Ω
Sensitivity at 70% Damping	69.2 V/m/s (1.75 V/in/s)
Damping	70%
Distortion at all tilt angles	<0.2% measured at 15 Hz with 0.2 in/s p-p

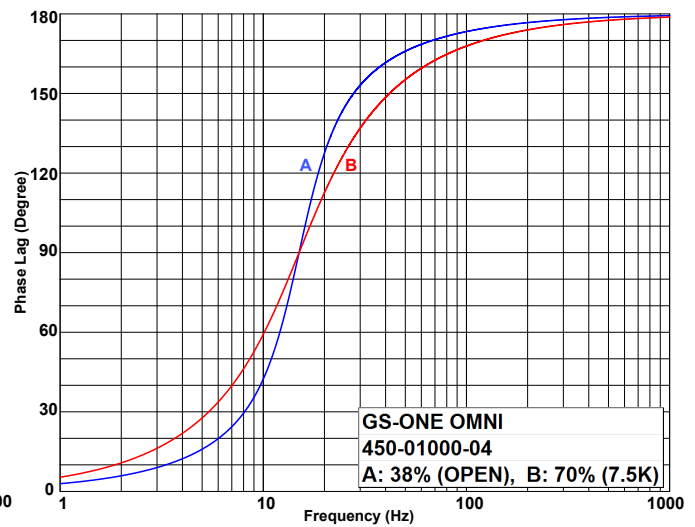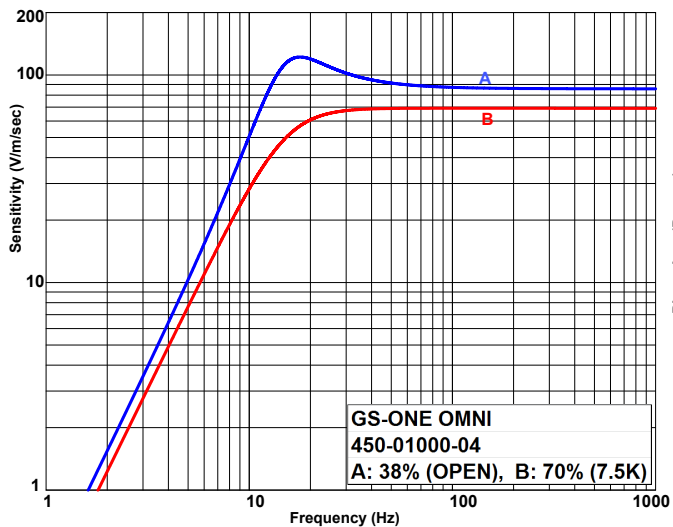

ELECTRICAL SPECIFICATIONS

Nominal Capacitance (at 25°C 1atm)	16.0 nanofarads
Voltage Sensitivity²	4 V/Bar
Sensitivity (dBv ref 1 μPa @ 25°C)	-208
Frequency Response (into 2 MΩ load)	5–1000 Hz (typical)

1. Safe to be used slightly below 0°C as long as water is not frozen. Do not let hydrophone be frozen in ice, as this will cause irreversible damage to the crystals.
2. Voltage Sensitivity is specified when connected to OBX.

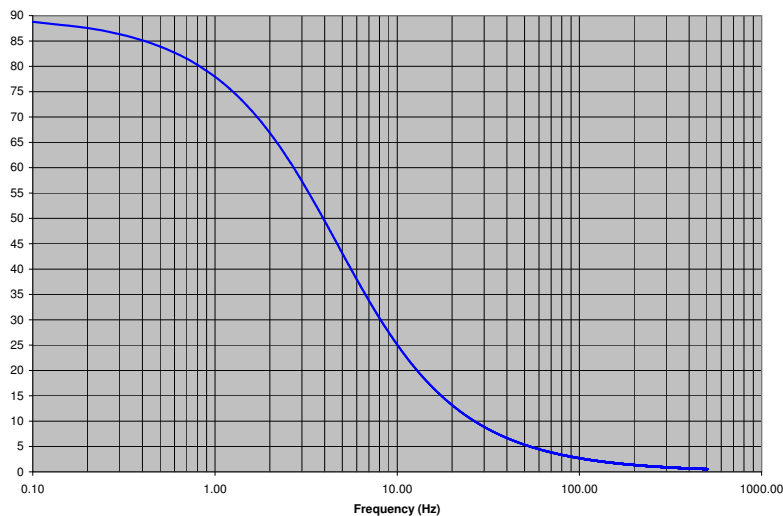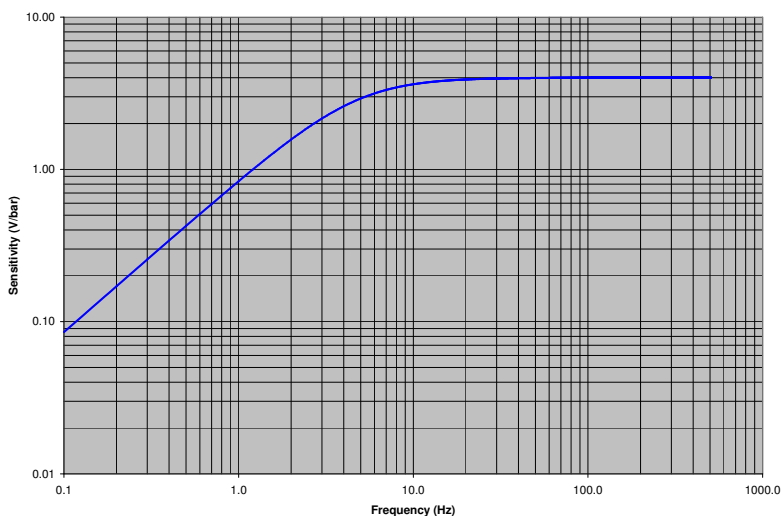

OBX-750E

MECHANICAL SPECIFICATIONS	Metric	US
Length	521 mm	20.5 in.
Width	208 mm	8.2 in.
Height	108 mm	4.25 in.
Weight in Air	11.85 kg	26 lbs.
Weight in Seawater	4.1 kg	9.0 lbs.
Maximum Operating Pressure	7.5 MPa/75 Bar	1095 psi
Maximum Operating Depth	750 M	2460 ft.
Operating Temperature Range	-5°C to +50°C	+23°F to +122°F

ELECTRICAL SPECIFICATIONS	
Digitized 4C Recording Station:	4 Channel, 24 Bit A/D Digitizer 3C Orthogonal oriented GS-One OMNI Geophones 1 MP-18BH-2500 Hydrophone
Digitization	24-bit Delta-Sigma
Sample Interval	0.25, 0.5, 1, 2, 4 ms
Pre-amplifier Gains	0, 6, 12, 18, 24, 30, 36 dB
Maximum Input Signal	1.8Vrms
Equivalent Input noise (@2ms sample interval)	0.17 μ Vrms
Gain Accuracy	Better than 1%
Anti-alias Filter	83% Nyquist
Instantaneous Dynamic Range	124dB @ 2 ms sample interval
THD	<0.2%
Distance Between Digitizer & Farthest Sensor	<18 cm
Distance Between All Sensors	<13 cm
Flash Memory	8 GB per channel
Frequency Response	1 Hz – 1650 Hz @ ¼ ms sample interval
Battery Module	60 days operation

All rights reserved. Specifications subject to change at sole discretion of Geospace Technologies.



7007 Pinemont Drive • Houston, Texas 77040 USA

www.geospace.com

Tel: 713-986-4444 • Fax: 713-986-4445



Geospace Technologies, Canada
2735 - 37th Avenue N.E.
Calgary, Alberta,
T1Y 5R8 Canada
403 250-9600

Geospace Technologies, China
Room 700, 7th Floor
Lido Office Tower, Lido Place
Jichang Road, Jiang Tai Road
Beijing, 100004, P.R.China
011 (86) 10 6437 8768

Geospace Technologies
Sucursal Sudamericana
Carrera 127-22 G 28 Int. 30
Agrupación Industrial La Esperanza
Bogotá, Colombia
011-57-1-742-7414

Geospace Technologies, Eurasia
Kirovogradskaya, 36
Ufa, Baskortostan
Russia 450001
011 (7) 3472 25 39 73

Geospace UK
F3 Bramingham Business Park,
Enterprise Way, Luton
Bedfordshire LU3 4BU, England
011 44 (0) 7775 688 467