



SMG vs. ONE

	SMG	GS-ONE	
Frequency	10 ± 5%	10 ± 3.5%	Hz
Resistance	3850 ± 5%	1800 ± 5%	ohm
Open Circuit Sensitivity	2.00 ± 10%	2.18 + 5%, -3.5%	V/ips
Open Circuit Damping	0.60 to 0.75	0.48 to 0.54	
Distortion	<0.15	<0.15	
Distortion measured at 12Hz	0.2	0.7	ips pk-pk
Spurious	>240	>240	Hz
Mass	8.2	14	g
Maximum Coil Excursion	0.06	0.14	in pk-pk
*Tilt Angle for Vertical	35	70	degrees
*Tilt Angle for Horizontal	10	40	degrees
With Input Resistance	2 Meg	20K	Ohm
Voltage Sensitivity	2.00 typical	2.00 typical	V/ips
Damping	0.7	0.7	typical
Weight	43	130	g
Diameter	0.88	1.20	in
Height	1.06	1.60	in

**Tilt Angle when coil hits end stop*

All rights reserved. Specifications subject to change at sole discretion of Geospace Technologies.

GEOPHONE COMPARISON

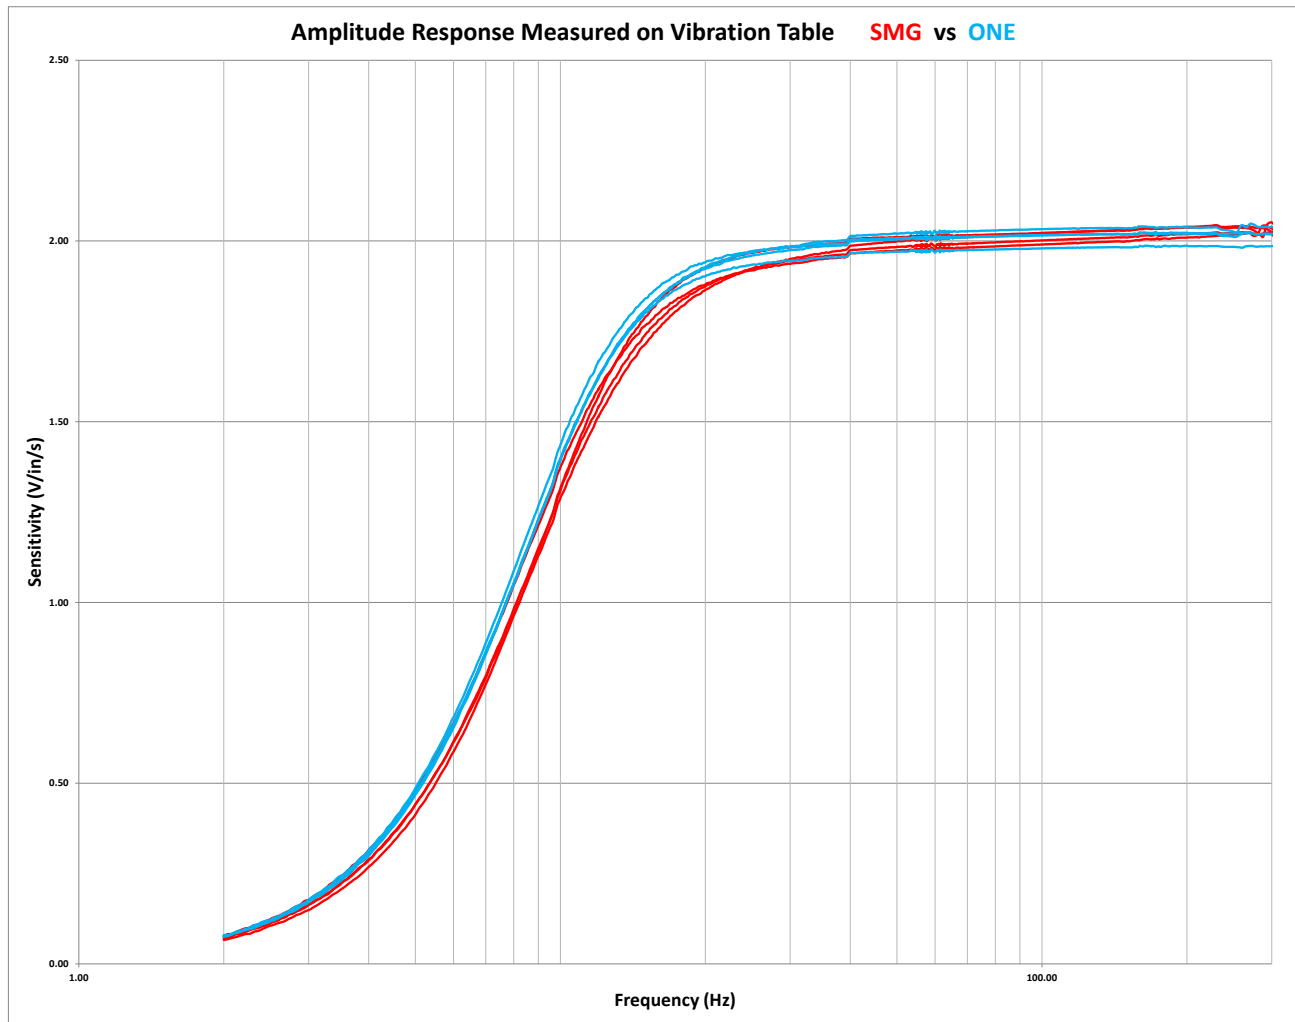

SMG

VS.

ONE



7007 Pinemont Drive • Houston, Texas 77040 USA

www.geospace.com

Tel: 713-986-4444 • Fax: 713-986-4445



Geospace Technologies, Canada
2735 - 37th Avenue N.E.
Calgary, Alberta,
T1Y 5R8 Canada
403 250-9600

Geospace Technologies, China
Room 700, 7th Floor
Lido Office Tower, Lido Place
Jichang Road, Jiang Tai Road
Beijing, 100004, P.R.China
011 (86) 10 6437 8768

Geospace Technologies
Sucursal Sudamericana
Carrera 127-22 G 28 Int. 30
Agrupación Industrial La Esperanza
Bogotá, Colombia
011-57-1-742-7414

Geospace Technologies, Eurasia
Kirovogradskaya, 36
Ufa, Baskortostan
Russia 450001
011 (7) 3472 25 39 73

Geospace UK
F3 Bramingham Business Park,
Enterprise Way, Luton
Bedfordshire LU3 4BU, England
011 44 (0) 7775 688 467