

AQUANAUT™

OCEAN BOTTOM RECORDER



- Continuous cable-free 4C autonomous recording
- Battery module: 150 days operation
- Built-in full resolution test generator
- Solid-state flash memory: 32 GB per channel
- Internal Heading Sensor
 - 3 Component Magnetic Sensor
 - $\pm 5^\circ$ Accuracy
 - Measurements written to header every 2,000 samples

GS-ONE OMNI

10 Hz Geophone



PHYSICAL SPECIFICATIONS

Moving Mass	13.2 g	0.466 oz
Maximum coil excursion p-p	6.10 mm	0.240 in.
Minimum coil excursion p-p	0.89 mm	0.035 in.
Diameter	30.5 mm	1.2 in.
Height	43.2 mm	1.7 in.
Weight	125 g	4.40 oz
Operating and Storage Temperature Range	-40°C to +100°C	-40°F to +212°F

ELECTRICAL SPECIFICATIONS

All parameters are specified with 7.5k Ω load at 25°C in all tilt positions unless otherwise stated.

Frequency	10 Hz
Spurious Frequency	150 Hz
Resistance with Shunt	2500 Ω
Open-Circuit Sensitivity	100 V/m/s (2.55 V/i/s)
Sensitivity at 70% Damping	85 V/m/s (2.15 V/i/s)
Total Damping	70%
Distortion at all tilt angles	<0.2% measured at 12 Hz with 0.1 in/s p-p

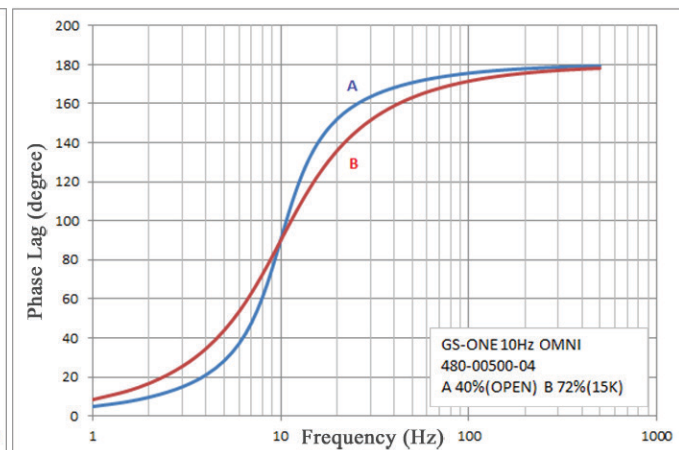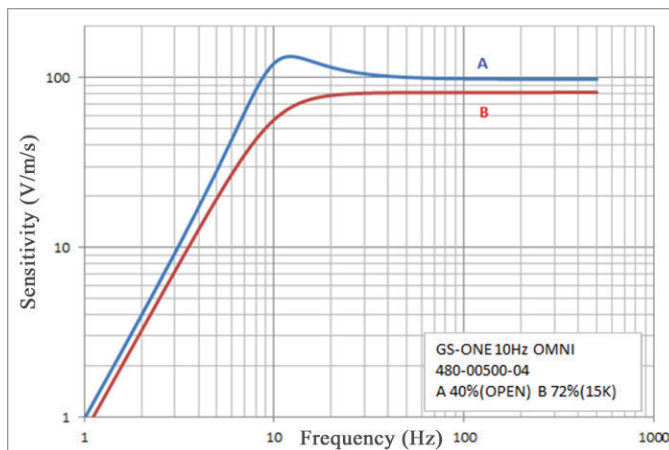

HYDROPHONE

PHYSICAL SPECIFICATIONS

Maximum Operating Pressure	30.4 MPa (4,400 psi)
Maximum Working Depth	3048 m (10,000 ft.)
Operating Temperature Range ¹	-10 to +75°C (+14 to 167°F)

ELECTRICAL SPECIFICATIONS

Nominal Capacitance (at 25°C 1atm)	10.0 nanofarads
Voltage Sensitivity ²	8.9 $\mu\text{V}/\mu\text{Bar}$
Sensitivity (dBv ref 1 μPa @ 25°C)	-201 dB re 1V/ μPa
Frequency Response (into 2 M Ω load)	2 –30,000 Hz

1. Safe to be used slightly below 0°C as long as water is not frozen. Do not let hydrophone be frozen in ice, as this will cause irreversible damage to the crystals.

2. Voltage Sensitivity is specified when connected to the Aquanaut.

MECHANICAL SPECIFICATIONS (HOUSING)	METRIC	US
Length	358 mm	14.1 in.
Width	222 mm	8.8 in.
Height	118 mm	4.7 in.
Weight in Air	18 kg	39.6 lbs.
Weight in Seawater	12 kg	26.4 lbs.
Maximum Operating Pressure	30.4 MPa/304 Bar	4,400 psi
Maximum Operating Depth	3,048 M	10,000 ft.
Operating Temperature Range	-5°C to +60°C	+23°F to +140°F
Storage Temperature Range	-10°C to +60°C	+14°F to +140°F

ELECTRICAL SPECIFICATIONS

Digitized 4C Recording Station: 4 Channel, 24 Bit A/D Digitizer
3C Orthogonal oriented GS-One OMNI 10 Hz Geophones
1 Hydrophone

Digitization	24-bit Delta-Sigma
Sample Interval	0.5, 1, 2, 4 ms
Pre-amplifier Gains	0, 6, 12, 18, 24, 30, 36 dB
Maximum Input Signal	1.8 Vrms
Equivalent Input noise (@2ms sample interval)	0.12 μ Vrms
Gain Accuracy	Better than 1%
Anti-alias Filter	83% Nyquist
Instantaneous Dynamic Range	129 dB @ 2 ms sample interval
THD	<0.2%
Distance Between Digitizer & Farthest Sensor	<18 cm
Distance Between All Sensors	<11 cm
Flash Memory	32 GB per channel
Frequency Response	1 Hz – 825 Hz @ 1/2 ms sample interval
Battery Module	150 days operation

CLOCK SPECIFICATIONS

Days	30	60	90	100
Max Uncorrected Drift	2 ms	8 ms	17 ms	21 ms
Corrected Drift	<.25 ms	<.5 ms	1 ms	1 ms

7007 Pinemont Drive • Houston, Texas 77040 USA
www.geospace.com • T: 713-986-4444 • F: 713-986-4445

Geospace Technologies, Canada
2735 - 37th Avenue N.E.
Calgary, Alberta,
T1Y 5R8 Canada
403 250-9600

Geospace Technologies
Sucursal Sudamericana
Carrera 127-22 G 28 Int. 30
Agrupación Industrial La Esperanza
Bogotá, Colombia
011-57-1-742-7414

Geospace Technologies, Eurasia
Kirovogradskaya, 36
Ufa, Baskortostan
Russia 450001
011 (7) 3472 25 39 73

Geospace UK
F3 Bramingham Business Park,
Enterprise Way, Luton
Bedfordshire LU3 4BU, England
011 44 (0) 7775 688 467