

900 MHz UNDERLID ANTENNA



Features:

- Screw-on design mounts to underside of lids
- Robust construction
- Hermetically sealed for extended life
- Larger gain reception area compared to other brands

900 MHz UNDERLID ANTENNA


ELECTRICAL SPECIFICATIONS

Frequency Band	902-928 MHz
Impedance	50 Ω
E-Plane HPBW	30° typical
Power Handling	5 W
VSWR	< 1.3 : 1 typical
Gain	2 dbi
H-Plane HPBW	Onmidirectional
Polarization	Vertical

MECHANICAL SPECIFICATIONS

Height	2 ½ inches (6.35 cm)
Connector	Proprietary waterproof GNC
Operational Range	-40 to 158° F (-40 to 70° C)
Diameter (Ground Plane)	4 ¼ inches (10.8 cm)
Mounting Type	1.75-8 ACME Thread Dual Blunt Start, Blunt End

All rights reserved. Specifications subject to change at sole discretion of Geospace Technologies.

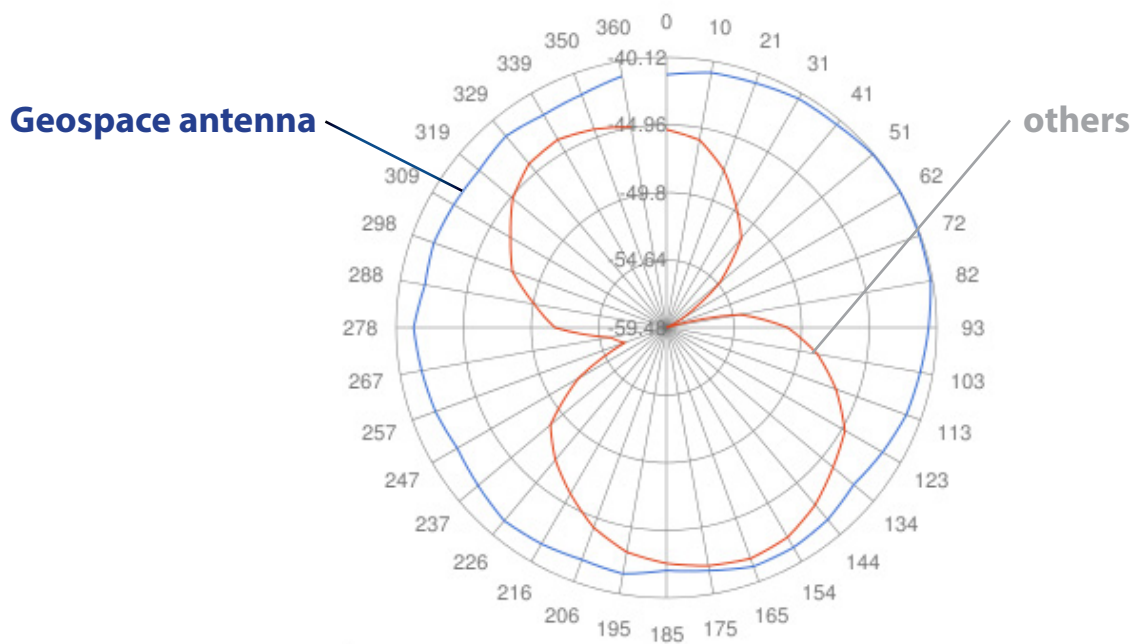

Comparison with industry standard



7007 Pinemont Drive • Houston, Texas 77040 USA

www.geospace.com

Tel: 713-986-4444 • Fax: 713-986-4445



Geospace Technologies, Canada
2735 - 37th Avenue N.E.
Calgary, Alberta,
T1Y 5R8 Canada
403 250-9600

Geospace Technologies, China
Room 700, 7th Floor
Lido Office Tower, Lido Place
Jichang Road, Jiang Tai Road
Beijing, 100004, P.R.China
011 (86) 10 6437 8768

Geospace Technologies
Sucursal Sudamericana
Carrera 127-22 G 28 Int. 30
Agrupación Industrial La Esperanza
Bogotá, Colombia
011-57-1-742-7414

Geospace Technologies, Eurasia
Kirovogradskaya, 36
Ufa, Baskortostan
Russia 450001
011 (7) 3472 25 39 73

Geospace UK
F3 Bramingham Business Park,
Enterprise Way, Luton
Bedfordshire LU3 4BU, England
011 44 (0) 7775 688 467